


4 PERSON MKIV Coastal

Coastal

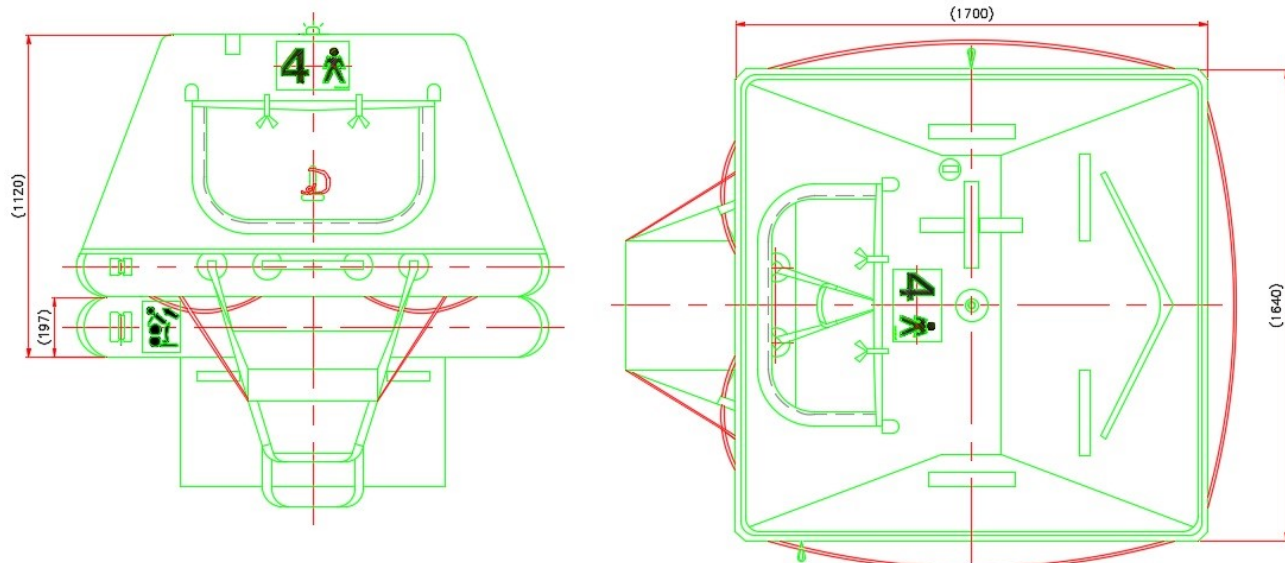


	2 knot		3 knot	
Tow Force	0.58kN	130lbf	1.03kN	232lbf

Authorities

TC, USCG

Container: LPC MK12 S2

Equipment Pack: Coastal

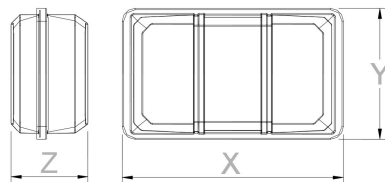


	X	Y	Z	Weight
Raft	860mm	510mm	300mm	36kg
	2' 9 3/4"	1' 9"	11 3/4"	79lbs

Max Stowage Height	Painter Length
6m	12m
20'	39'

Container: Valise Size 2

Equipment Pack: Coastal

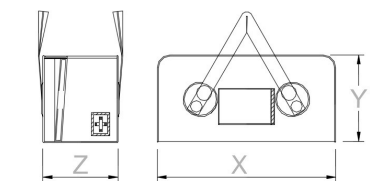

	X	Y	Z	Weight
Raft	780mm	330mm	340mm	31kg
	2' 6 3/4"	1' 1"	1' 1 1/2"	68lbs

Max Stowage Height	Painter Length
6m	12m
20'	39'


Dimensions and weight +/- 5%

Survitec Group reserves the right to change specification without notice.

For installation, add minimum +10mm for clearance to dimensions of the container.

6 PERSON MKIV Coastal

Coastal

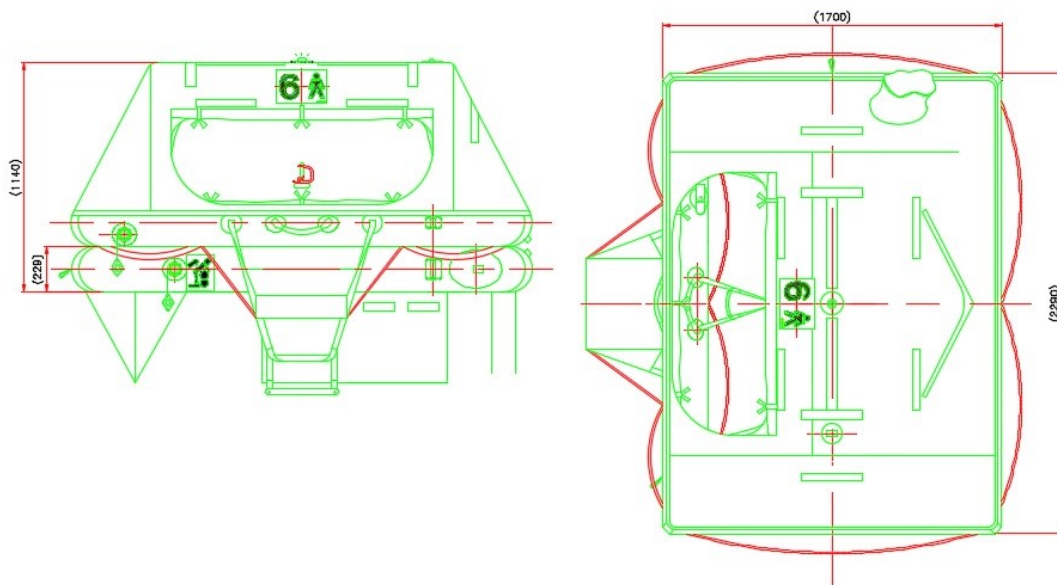


Authorities

TC, USCG

	2 knot		3 knot	
Tow Force	0.72kN	162lbf	1.23kN	277lbf

Container: LPC MK12 S3

Equipment Pack: Coastal

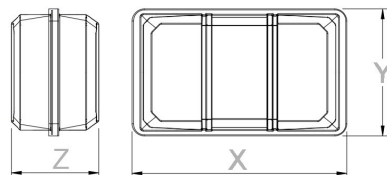


	X	Y	Z	Weight
Raft	860mm	510mm	350mm	45kg
	2' 9 3/4"	1' 9"	1' 1 3/4"	99lbs

Max Stowage Height	Painter Length
6m	12m
20'	39'

Container: Valise Size 3A

Equipment Pack: Coastal



	X	Y	Z	Weight
Raft	780mm	455mm	435mm	38kg
	2' 6 3/4"	1' 6"	1' 5 1/4"	84lbs

Max Stowage Height	Painter Length
6m	12m
20'	39'


Dimensions and weight +/- 5%

Survitec Group reserves the right to change specification without notice.

For installation, add minimum +10mm for clearance to dimensions of the container.

8 PERSON MKIV Coastal

Coastal

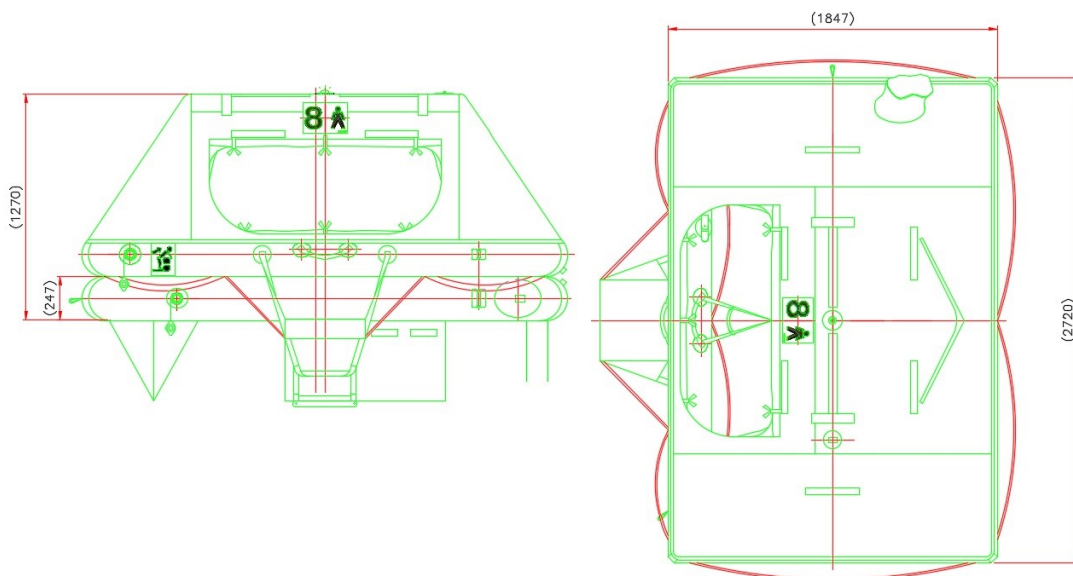


	2 knot		3 knot	
Tow Force	0.65kN	146lbf	1.5kN	337lbf

Authorities

TC, USCG

Container: LPC MK12 S3

Equipment Pack: Coastal

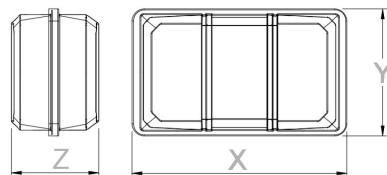


	X	Y	Z	Weight
Raft	860mm	510mm	350mm	47kg
	2' 9 3/4"	1' 9"	1' 1 3/4"	104lbs

Max Stowage Height	Painter Length
6m	12m
20'	39'

Container: Valise Size 4

Equipment Pack: Coastal



	X	Y	Z	Weight
Raft	780mm	470mm	510mm	41kg
	2' 6 3/4"	1' 6 1/2"	1' 9"	90lbs

Max Stowage Height	Painter Length
6m	12m
20'	39'

Dimensions and weight +/- 5%

Survitec Group reserves the right to change specification without notice.

For installation, add minimum +10mm for clearance to dimensions of the container.